

# Aritco 7000 Flexi

- for persons and goods

muziek  
verhaalen  
film  
sparing  
vorming

## Aritco 7000 Flexi

Aritco 7000 Flexi is a version of the Aritco 7000 lift that is intended for both persons and goods. A risk assessment has been conducted to assess the additional risk that will come when using the platform for both persons as well as for goods. Measures to reduce these risks have been taken and they are now implemented for Aritco 7000 Flexi. Aritco 7000 Flexi has its own certificate.

### Several advantages offered by Aritco 7000 Flexi:

- Certificate for persons and goods
- Optimal design and size
- 'A' rated energy consumption according to VDI4707
- 95% recyclable materials
- Environmental classification by the Swedish Sunda Hus organization
- Patented screw/nut technology (no oil that can leak)
- The lowest maintenance and operating costs on the market


For more information please visit [aritcoplatformlifts.com/7000](http://aritcoplatformlifts.com/7000)



### Standard for Aritco 7000 Flexi:

Platform with security list mounted behind the platform faceplate painted in yellow (RAL 1018). Valid when having a half height wall.

Loading information label. The label is placed on the platform with pictograms warning.




Platform with safety edge painted in yellow (RAL 1018).

Certificate for persons and goods.

### Option:

Steel kerb. For extra protection of the platform and the shaft walls. The steel kerb is a 90 mm high steel frame placed on all sides on the platform, except for door sides. It is recommended when using the lift also for goods.



# Aritco 7000 Flexi

## LIFT COLOUR

Can be painted in any RAL colour from the RAL Classic chart.




## GLASS

4 different glass types to choose from.




## FLOOR


9 different floorings to choose from.

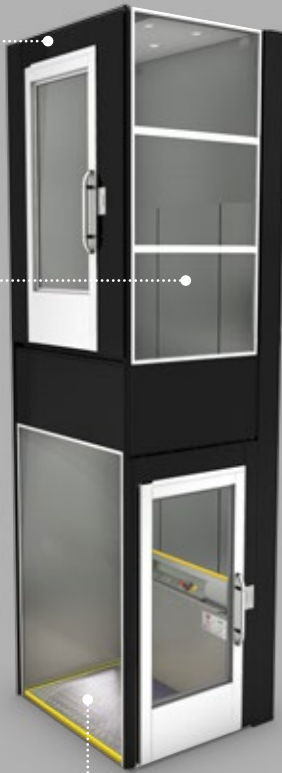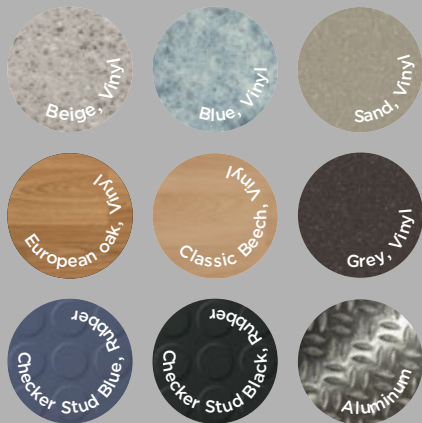


**Size:** 900 x 1040 mm  
**Rated load:** 250 kg / 2 pers.  
**Wheelchair:** -

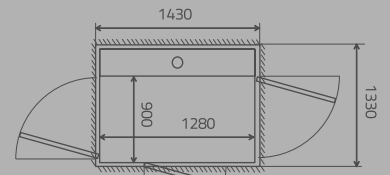


**Size:** 900 x 1280 mm  
**Rated load:** 410 kg / 5 pers.  
**Wheelchair:** Lone user or type A\*

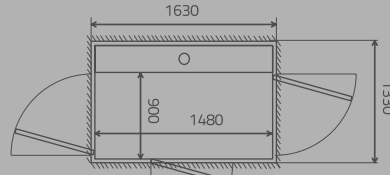


**Size:** 900 x 1480 mm  
**Rated load:** 410, 500 kg / 5, 6 pers.  
**Wheelchair:** A or B with attendant\*

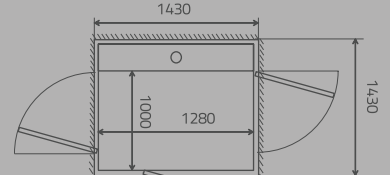


**Size:** 1000 x 1280 mm  
**Rated load:** 410 kg / 5 pers.  
**Wheelchair:** Lone user or type A\*

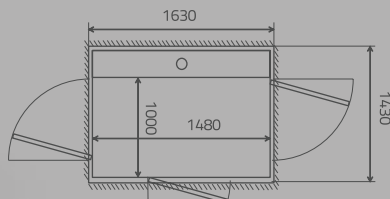


**Size:** 1000 x 1480 mm  
**Rated load:** 410, 500 kg / 5, 6 pers.  
**Wheelchair:** A or B with attendant\*

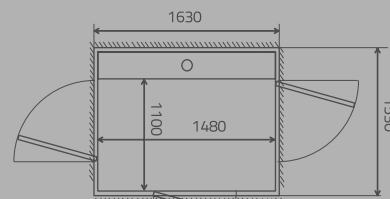

**Size:** 1100 x 1480 mm  
**Rated load:** 410, 500 kg / 5, 6 pers.  
**Wheelchair:** A or B with attendant, adjacent entry\*

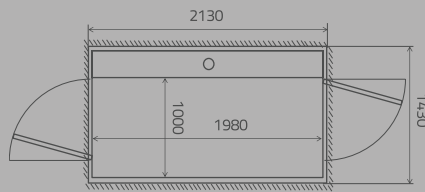

**Size:** 1000 x 1980 mm  
**Rated load:** 500 kg / 6 pers.  
**Wheelchair:** A or B with attendant\*

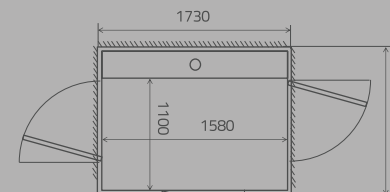

**Size:** 1100 x 1580 mm  
**Rated load:** 500 kg / 6 pers.  
**Wheelchair:** A or B with attendant, adjacent entry\*

\* National guidelines may apply.  
 Wheelchair Type A and B according to EN 12183/EN 12184.

## Product summary

<p><b>TOP HEIGHT</b></p> <p><b>Minimum 2240 mm</b></p>	<p><b>TYPE OF LIFT</b></p> <p>Platform lift intended for installation in public environments.</p>	 <p><b>RATED SPEED</b></p> <p>Max <b>0,15 m/s</b></p>	 <p><b>DRIVE SYSTEM</b></p> <p>Patented screw and nut system</p> <p>2.2 kW motor</p>	<p><b>CONTROL FROM CARRIER CONTROL PANEL</b></p> <p><b>Hold to run</b> - press and hold</p> <p><b>For installations outside Europe</b></p> <p>- One touch operation (press one time)</p>	<p><b>NUMBER OF FLOORS</b></p>  <p>2 to 6 floors</p>
 <p><b>INSTALLATION</b></p> <p><b>Recessed installation</b></p> <p>50 mm below floor</p> <p><b>Installed directly on floor</b> with 50 mm ramp</p>	<p><b>INDOOR</b></p> <p>INSTALLATION ENVIRONMENT</p>	<p><b>TRAVEL HEIGHT</b></p> <p><b>250-13 000 millimeter</b></p>	 <p><b>WARRANTY</b></p> <p>Aritco 7000 Flexi comes with a 24 month warranty. The screw and nut assembly has a 10 year warranty.</p>	 <p><b>TECHNICAL COMPLIANCE</b></p> <p>European Machine directive 2006/42/EC</p> <p>European standard EN 81-41</p>	
<p><b>Power supply:</b> 230 V 1-phase / 400 V 3-phase</p> <p><i>Emergency lowering:</i> Battery-powered</p>					